


WIDE LADDER

Part of the flexible sided ladder range from Lyon Equipment

The WIDE LADDER is wide enough for both feet, giving increased stability and additional comfort when stationary - used for applications such as inspection of silos and communications structures. WIDE LADDERS are made from either aluminium alloy or glass reinforced plastic (GRP) rungs with flexible wire or textile rope sides.


[See overleaf for detailed product features](#)

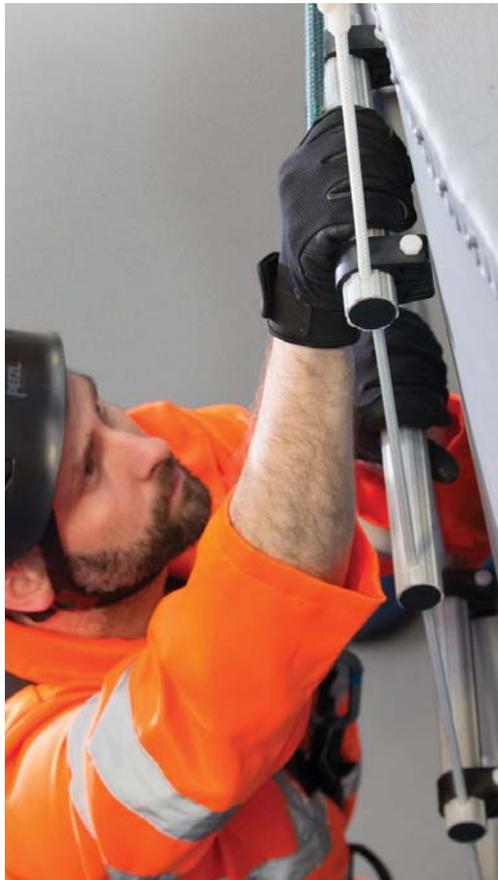

CODE		RUNG SPACING	MATERIALS
Wide Rung - 4mm galvanised steel wire side - 25mm plain aluminium alloy rungs 270mm wide			
LO 4 __ 25 WA	Swaged Eye Fittings	25cm	Galvanised steel with plain rungs
LO 4 __ 30 WA		30cm	
Wide Black Rung - 4mm Stainless Steel wire side - 25mm anodised rungs 270mm wide			
LO 4 __ 25 WSA	Swaged Eye Fittings	25cm	Stainless steel with black anodised rungs
LO 4 __ 30 WSA		30cm	
NI06	Removable S/S Maillon connector for S/S wire sided ladder		
Wide GRP Rung - 4mm Stainless Steel wire side - 34mm glass reinforced plastic rungs 270mm wide			
LO 4 __ 25 WG	Swaged Eye Fittings	25cm	Stainless steel with GRP rungs
LO 4 __ 30 WG		30cm	
NI06	Removable S/S Maillon connector for S/S wire sided ladder		
Wide GRP Rung - 8mm polyester rope side - 34mm glass reinforced plastic rungs 270mm wide			
LO 8 __ 25 WG	Sewn Eye Fittings	25cm	Polyester rope with GRP rungs
LO 8 __ 30 WG		30cm	
Lyon Rung Stand-offs (to hold a rung 22mm away from a wall)			
GRPOFF	Rung Stand-Offs (Pair)	For GRP rungs only	

At Lyon Equipment, we design, manufacture and supply high quality and innovative, adventure, work at height and specialist rescue equipment - delivering expert advice on all our products and their applications




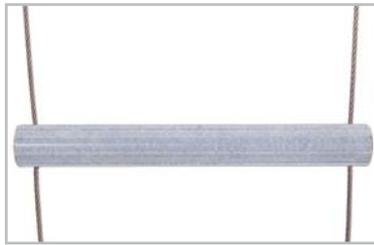

GRP Rung with wire sides



GRP Rung with rope sides

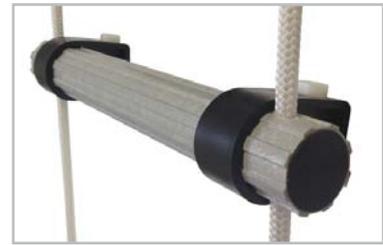

Rung Stand-Offs

Product features:

- Wide enough to fit both feet side by side
- Large diameter rungs are easier to hold and more comfortable to stand on
- Metal or GRP/textile construction options
- Available with three rung and two side options
- Choice of rung spacings - 25 or 30cm
- Made to order lengths of up to 15mtrs
- Easily joined together if necessary

Sides

Regular wire -

the most popular style - durable and versatile. Recommended for frequent use. Uses 4mm wire.

Stainless Steel wire -

providing additional corrosion resistance. Uses 4mm wire.

Rungs

Plain alloy -

plain aluminium alloy rung. The standard for most applications.

Black anodised -

fitted on stainless steel wire rope sides, providing additional corrosion resistance.

GRP -

large diameter glass reinforced plastic (GRP) with deep fluting for easy grip.

End Fitting options:



Maillon



Swaged Eye

For complete user instructions please visit www.lyon.co.uk/user-instructions

Lyon Equipment provide other ladder solutions - to learn more about our products and the services we offer please visit www.lyon.co.uk



Lyon Equipment Limited
 Unit 3-7, Tebay Business Park,
 Old Tebay, Penrith, Cumbria,
 CA10 3SS, UK
 Company number 3107118
 Registered in England & Wales.

venture further

